


***The Ergomat AFS Complete Smooth is made of pure polyurethane and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate mat for areas combining sitting and standing or where static electricity control is a must.***

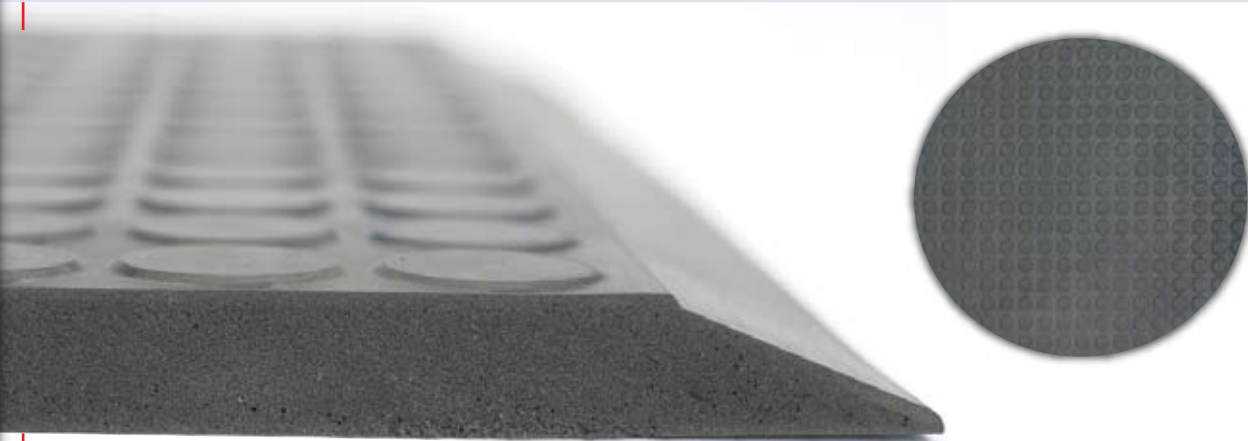

### Unmatched Safety Features

- Molded beveled edges
  - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
  - No overlapping or worn-out connecting mats, also eliminating tripping hazards

### Highest Quality

- Raw virgin material only
  - Unbeaten durability and ergonomic benefits

### The Complete Smooth Advantage

- Solid mat throughout
- Fire retardant
- Resists moderate oils and liquids
- Anti-static properties
- Silicone & latex free
- Cleanroom ISO Class 5 (100)

## 5-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage\* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

\* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

**ERGOMAT<sup>®</sup> AFS Complete Smooth**

**ERGOMAT<sup>®</sup>**

<b>Properties</b>	<b>Standard</b>	<b>ERGOMAT Complete Smooth</b>
<b>Material</b>		Foamed Polyurethane
<b>Color</b>		Grey
<b>Weight</b>		2200 g +/- 50 g // 4.85 lbs +/- 0.1 lbs
<b>Length without beveled edges</b>		91 cm +/- 1% // 35.8" +/- 0.38"
<b>Width without beveled edges</b>		60 cm +/- 1% // 23.6" +/- 0.38"
<b>Thickness</b>		11 mm // 0.43"
<b>Density</b>	ISO 2781	390 kg/m <sup>3</sup> +/- 10 %
<b>Hardness</b>	DIN 53505	15-22 Sh A
<b>Compression Pressure face = ø 100 mm % by pressure of 240 kg</b>	Tinby A/S standard	50%
<b>Abrasion Load = 5 N</b>	ISO 46 49 (5 N)	540 mm <sup>3</sup> // 21 in <sup>3</sup>
<b>Breaking point / tensile strength</b>	EN ISO 527-1	1,3 Mpa
<b>Elongation at break</b>	EN ISO 527-1	230%
<b>Tearing strength</b>	ASTM D 624	2,5 N/mm
<b>Electrical resistance Surface point to point % 50 RH</b>	IEC-61340-4-1/ ESD STM7.1-2001	1 x 10 <sup>9</sup> Ω - 5 x 10 <sup>9</sup> Ω
<b>Fire behavior</b>	EN 13501-1 (DIN 4102-B1 Part 14)	Cfl-s1 (B)
<b>Thermal properties</b> Minimum use Maximum use Maximum short duration	The ergonomic properties remain	0°C // 32°F 80°C // 176°F 120°C // 248°F
<b>UV-resistance</b>		Inferior
<b>Hydrolytic resistance</b>		Good
<b>Cleanroom application</b>	EN ISO 14644-1	ISO Class 5 (100)
<b>Warranty</b>		5 years